
PLEASE NOTE:

this cill solution is only for use in low rise domestic buildings of less than 4 stories with punched hole windows.

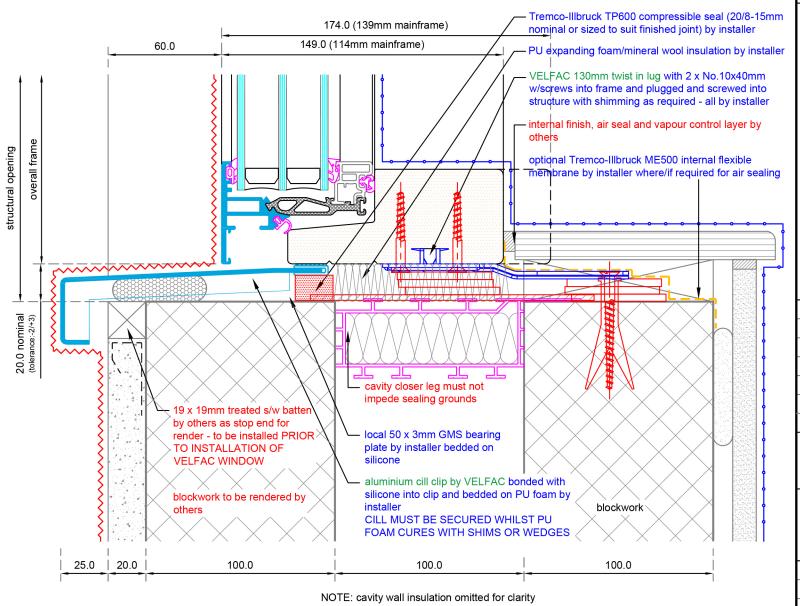


IMPORTANT NOTE: When installing VELFAC windows and accessories, please ensure compliance with national building regulations and British/European standards where necessary. This drawing is for guidance only and the customer must be satisfied that the principles outlined in this drawing are effectively transposed to suit specific project requirements and site conditions.

All dimensions are in millimetres where shown. Do not scale

NOTES:

- External weather seal to be either Tremco-Illbruck joint sealing tape sized to suit finished joint size or ARBOSIL 1090 silicone seal and polyethelene backing rod.
- Fixings and lugs to be installed strictly in accordance with VELFAC installation guidance.
- Fixing grounds must be able to withstand all loads transmitted from and through the VELFAC system.





Rev Date By Description



STANDARD INTERFACE DRAWING

itle.


VELFAC 200 ENERGY SYSTEM

TYPICAL CLIPPED CILL DETAIL

rendered block/block masonry

	Scale:	1:2 approx. @ A4	Drawing no:
	Date:	January 2017	V200E.W1.03.A.C.002
	Drawn:	Studio62	V200E.W1.03.A.C.002
ı	Status:	approved	Revision:

© VELFAC Ltd. This drawing must not be copied, reproduced or published in whole or in part for commercial gain without prior written permission of VELFAC

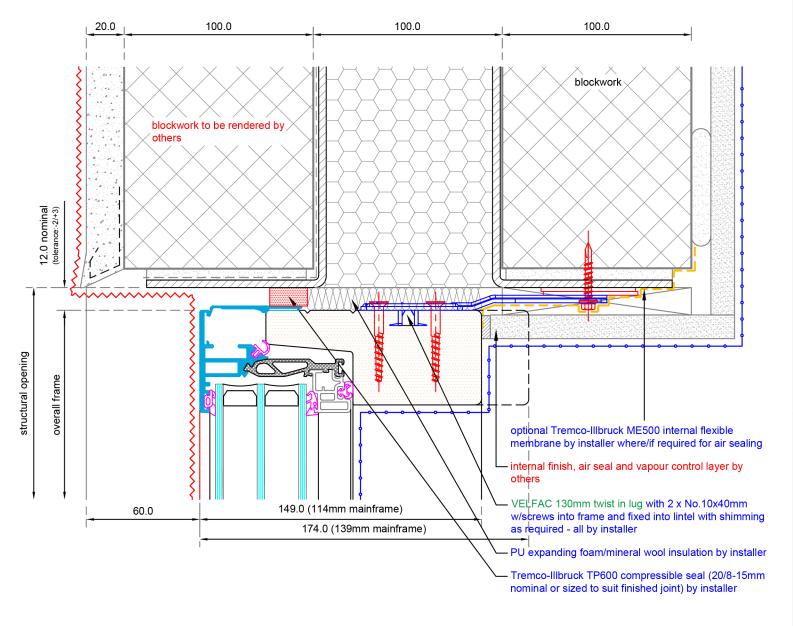


IMPORTANT NOTE: When installing VELFAC windows and accessories, please ensure compliance with national building regulations and British/European standards where necessary. This drawing is for guidance only and the customer must be satisfied that the principles outlined in this drawing are effectively transposed to suit specific project requirements and site conditions.

All dimensions are in millimetres where shown. Do not scale

NOTES:

- External weather seal to be either Tremco-Illbruck joint sealing tape sized to suit finished joint size or ARBOSIL 1090 silicone seal and polyethelene backing rod.
- 2. Fixings and lugs to be installed strictly in accordance with VELFAC installation guidance.
- Fixing grounds must be able to withstand all loads transmitted from and through the VELFAC system.



Rev Date By Description



STANDARD INTERFACE DRAWING


Title:

VELFAC 200 ENERGY SYSTEM TYPICAL HEAD DETAIL

rendered block/block masonry

Scale:	1:2 approx. @ A4	Drawing no:	
Date:	January 2017	V200E W1 03 A H 00°	
Drawn:	Studio62	V200E.W1.03.A.H.0	
Status:	approved	Revision:	

© VELFAC Ltd. This drawing must not be copied, reproduced or published in whole or in part for commercial gain without prior written permission of VELFAC

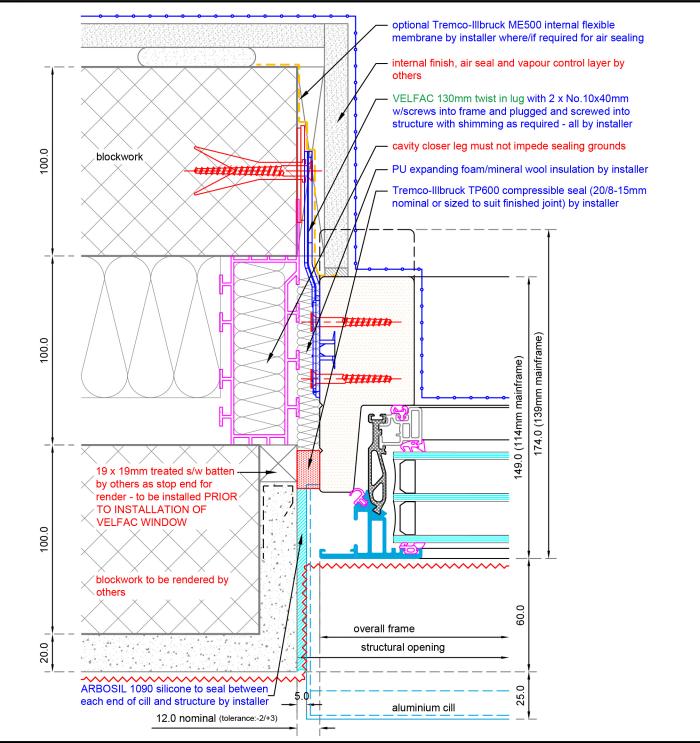


IMPORTANT NOTE: When installing VELFAC windows and accessories, please ensure compliance with national building regulations and British/European standards where necessary. This drawing is for guidance only and the customer must be satisfied that the principles outlined in this drawing are effectively transposed to suit specific project requirements and site conditions.

All dimensions are in millimetres where shown. Do not scale.

NOTES:

- External weather seal to be either Tremco-Illbruck sealing tape sized to suit finished joint size or ARBOSIL 1090 silicone seal and polyethelene backing rod.
- 2. Fixings and lugs to be installed strictly in accordance with VELFAC installation guidance.
- Fixing grounds must be able to withstand all loads transmitted from and through the VELFAC system.





Rev	Date	Ву	Description



STANDARD INTERFACE DRAWING

Title

VELFAC 200 ENERGY SYSTEM TYPICAL JAMB DETAIL

rendered block/block masonry

Scale:	1:2 approx. @ A4	Drawing no:
Date:	January 2017	V200E W1.03 A J.001
Drawn:	Studio62	V200E.VV1.03.A.J.00
Status:	approved	Revision:

© VELFAC Ltd. This drawing must not be copied, reproduced or published in whole or in part for commercial gain without prior written permission of VELFAC